



SEAL[®] 62 Base Laminator



The SEAL[®] 62 Base laminator represents SEAL's latest offering to the rapidly growing digital display market. Ideal for mounting and laminating pressure-sensitive graphics up to 61", this machine represents a flexible package at an affordable price - without compromising its functionality.

The SEAL 62 Base is a pressure-sensitive machine with heat assist on the top roller that ensures superb results with a wide range of materials. Whatever the experience level of the operator, the SEAL 62 Base is easy-to-use, and will deliver genuine flexibility and high performance levels for the small to medium sized user.

Having great capability delivered at an affordable price, the 62 Base is ideal for sign-

makers. It provides the means for these users to finish their images and create more applications, which equals generating greater profitability. This laminator is also suitable for small to medium display based businesses who want to expand their range of applications. With the lower unwind/take-up option, you can encapsulate with pressure-sensitive films.

The SEAL 62 Base provides the following features:

Optimum performance

- 61" working width to handle a wide range of media
- Adjustable pressure and speed settings for maximum versatility
- 2" nip opening to cover a wide range of substrates
- 2" nip opening suitable for working with a sled for road signs
- Heat assisted top roller for superb lamination performance
- Maximum operating speed of 16.4'/minute
- Manual nip adjustment for precise operation
- Robust, free standing design


Ease of use

- Ergonomic control panel for ease of use
- Auto-grip shafts for user friendly webbing
- Swing-up feed table to facilitate easy set up

Safety

- Foot switch for hands free operation
- Self checking safety eyes for increased operator safety
- CE certified

The SEAL 62 Base is ideal for producing a wide variety of display graphics (pressure sensitive materials only):

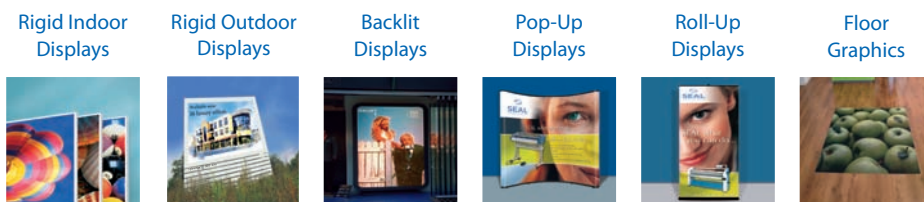


SEAL[®] 62 Base


Technical Specifications

| | |
|-----------------------------|---|
| Maximum Working Width | 61" (1575 mm) |
| Maximum Speed | 16.4' /min. (5 m/min.) |
| Maximum Substrate Thickness | 2" (50 mm) |
| Maximum Roller Temperature | 104°F (40°C) |
| Roller Heating | Heat assisted top roller |
| Width | 82" (2090 mm) |
| Height | 52" (1326 mm) |
| Depth (excl. table) | 19" (483 mm) |
| Depth (incl. in-feed table) | 23" (590 mm) |
| Working Height | 35.5" (900 mm) |
| Net Weight | 530lbs. (240 kg) |
| Shipping Dimensions | |
| Width | 86" (2184 mm) |
| Height | 61" (1500 mm) |
| Depth | 30" (762 mm) |
| Shipping Weight | 661 lbs. (300 kg) |
| Electrical Requirements | 115 VAC 50/60 Hz, 15A NEMA 5-20 plug |
| Item Number | 64338 |

Ergonomic control panel for ease of use.

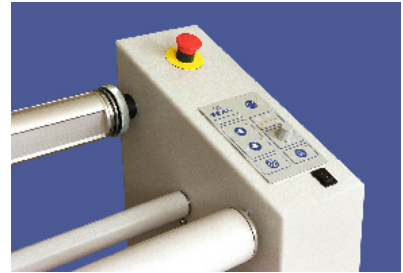

Auto-grip shafts for user friendly webbing.

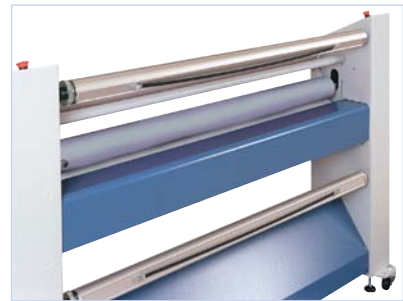

Contact your local distributor:

Neschen Americas
7091 Troy Hill Drive
Elkridge, MD 21075
U.S.A.
Tel: 410-540-8900
Fax: 410-579-8960

Neschen Americas Canada
1601 Matheson Blvd E., Unit 4
Mississauga, Ontario
Canada L4W 1H9
Tel: 905-212-9232
Fax: 905-212-9313

SEAL[®] Brand is a registered trademark of Neschen Americas

